

## 3D Very Long Range Terrestrial Laser Scanner with Online Waveform Processing

# RIEGL VZ-4000<sup>®</sup>

- *very long range up to 4,000 m*
- *eye safe operation at Laser Class 1*
- *wide field of view, 60° x 360°*
- *high speed data acquisition up to 222,000 meas. / second*
- *high accuracy, high precision ranging based on echo digitization and online waveform processing*
- *multiple target capability*
- *optional waveform data output*
- *built-in calibrated digital camera*
- *on-board inclination sensors*
- *integrated L1 GNSS receiver with antenna*
- *integrated compass*
- *built-in SSD drive storage*
- *compact and rugged design*
- *advanced camera options*

This 3D VZ-Line Laser Scanner offers superior and unrivaled long range measurement performance up to 4,000 m reflectorless while still maintaining completely eye safe operation (Laser Class 1).

RIEGL's unique V-Line technology is based on echo digitization and online waveform processing and is the key to enabling such extreme long range measurements. The VZ-4000 operates even in poor visibility and demanding multi target situations caused by dust, haze, rain, snow, etc. which are frequently found in difficult environments such as mining sites.

### Modes of Operation:

- stand-alone operation with integrated graphical user interface via 7" touchscreen
- remote control via VNC Viewer with any standard tablet PC or mobile device via WiFi
- remote operation with RISCAN PRO on a notebook via LAN or WiFi connection
- customized operation by third party tools / applications based on RIEGL's well documented interfaces and scanner libraries (e.g., RIVLib).

### Typical applications include

- *Topography & Mining*
- *Long Range Monitoring*
- *Civil Engineering*
- *Archaeology*



## VZ<sup>®</sup>-4000 Key Features and Components



### **Extremely Long Range Performance**

The High-Speed, High-Resolution 3D Laser Scanner *RIEGL VZ-4000* offers an extremely long range of more than 4,000 m and a wide field of view of 60° vertical and 360° horizontal. It uses an invisible laser beam for eye safe operation in Laser Class 1.

The high accuracy and reliability of range measurement performance is based on *RIEGL*'s unique V-Line technology of echo digitization and online waveform processing. Extreme long range measurements can be achieved even with poor visibility and demanding multi target situations caused by dust, haze, rain, snow, etc.

### **Built-in Camera**

A built-in calibrated 5-Megapixel camera capturing images deflected by the laser mirror enables coverage of the entire field of view with an appropriate number of high resolution images automatically stitched together to create a high resolution panorama image. This panorama image, in combination with precise 3D measurements produced by the VZ-4000, enables the creation of photorealistic virtual models for geological and geotechnical investigations, avalanche research, geomorphology, and other geological features.

### **Waveform Data Output Option**

The digitized echo signals, also known as waveform data, acquired by the *RIEGL VZ-4000* are the basis for waveform analysis. This data is provided via the optionally available waveform data output and accessible with the associated *RIEGL* software library *RiWAVELib* for investigations and research on multi target situations based on the digital waveform data samples of the target echoes.

### **Compatible Software Packages**

The *RIEGL VZ-4000* is compatible with the *RIEGL* software package *RiSCAN PRO* for terrestrial laser scanning, *RIEGL*'s interface library *RiVLib*, as well as the workflow-optimizing software packages, e.g., *RiMINING*.

## Supported Registration Methods

### Full Automatic Registration including detailed statistical report based on

- integrated GNSS or connected external high-end RTK GNSS receiver
- integrated compass, accuracy typically 1° (one sigma value, available for vertical scanner setup position)
- on-board inclination sensors (tilt range  $\pm 10^\circ$ , accuracy typ.  $\pm 0.008^\circ$ )
- automatic voxel and plane extraction for alignment of overlapping areas
- optionally usage of retro-reflector targets as control-points

### Standard Registration methods

#### GNSS Traversing


- GNSS position (RTK or autonomous)
- on-board inclination sensors
- automatic acquisition of well known remote target (reflector)

#### Free Stationing

- fast fine scanning of reflectors for precise determination of scanner position using control points

#### Backsighting

- setup on well known point
- on-board inclination sensors
- precise fine scanning of well known remote target (reflector)

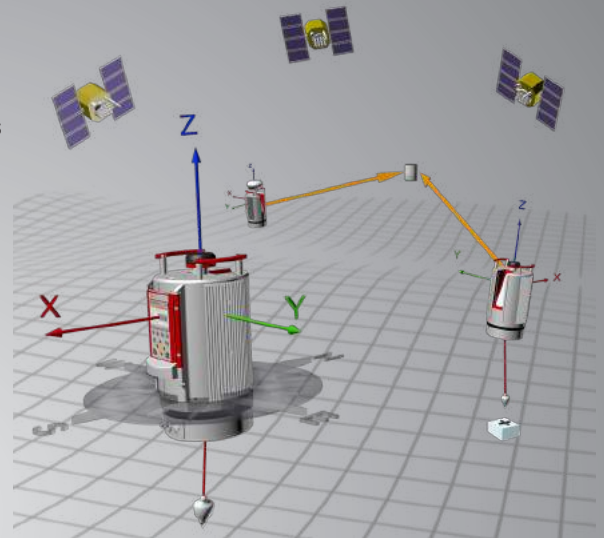

#### Mena3D Qatar

D-Ring  
P.O.Box: 22103  
Doha, Qatar  
Phone :+974 (0) 4 03 155 55  
Fax :+974 (0) 4 46 544 05  
contact@mena3d.com

#### Mena3D Services s.a.r.l

112 rue Radhia Haded  
1001 Tunis  
Tunisia  
Phone:+216 (0) 71 245 692  
Fax :+216 (0) 71 245 692  
contact@mena3d.com

#### Mena3D s.a.r.l

Beshara El Khoury Street  
4<sup>th</sup> Floor, Ghanaja Building  
Beirut, Lebanon  
Phone :+961 (0) 70 34 54 82  
contact@mena3d.com

#### Mena3D Trading FZE

JAFZA One Building  
10<sup>th</sup> Floor BB1007, JAFZA North  
P.O. Box 18215  
Dubai, United Arab Emirates  
Phone:+971 (0) 4 88 767 46  
Fax :+971 (0) 4 88 765 18  
contact@mena3d.com



#### Mena3D S.a.r.l

Avenue Allal El Fassi  
Residence Sanaa, 4<sup>th</sup> Floor  
Apartment No. 24  
Issil Marrakech, Morocco  
Phone :+212 (0) 5 24 45 83 94  
Fax :+212 (0) 5 24 45 86 74  
contact@mena3d.com




#### Mena3D GmbH

Vogelsangstrasse 27  
70176 Stuttgart  
Germany  
Phone:+49 (0) 711 94 56 82 82  
Fax :+49 (0) 711 94 56 82 88  
E-Mail: contact@mena3d.com  
www.mena3d.com




## Operating Elements and Connectors *RIEGL VZ<sup>®</sup>-4000*

All dimensions in mm.

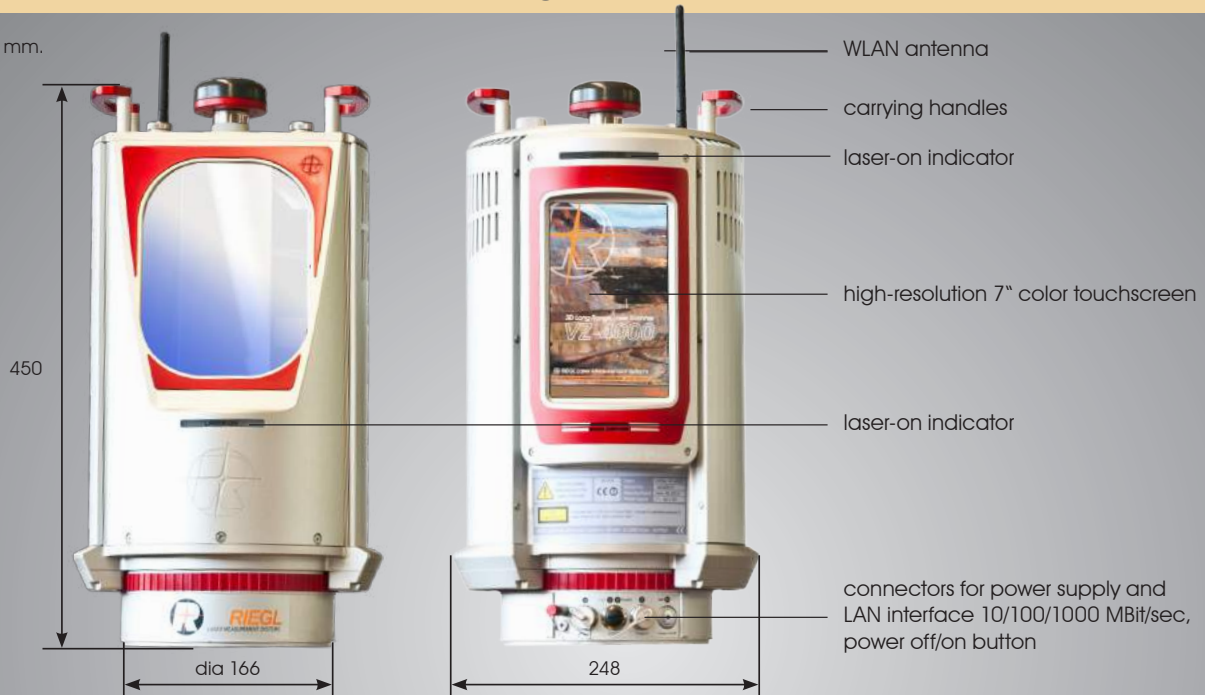

### Communication and Interfaces

- built in LAN port 10/100/1000 MBit/sec within base
- integrated WLAN interface with high-gain antenna
- USB 2.0 for connecting an external digital camera
- connector for GNSS antenna
- two external power supply ports
- connector for external GNSS synchronization pulse (1PPS)
- connector for external GNSS receiver

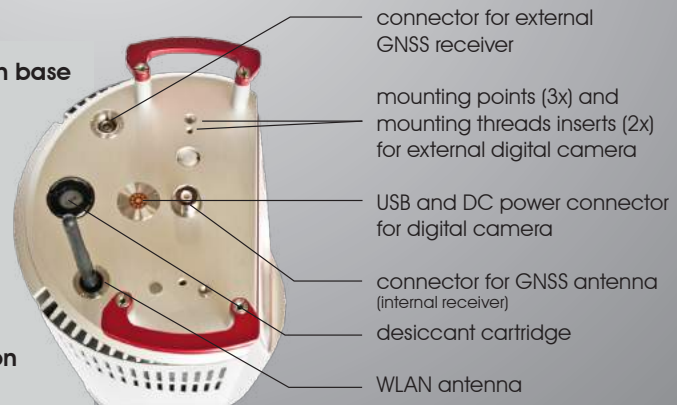


### Scan Data Storage

- internal 1 TB SSD (Solid State Disc) (2 GByte reserved for the operating system)
- external storage devices (USB flash drives or external hard drives) via USB 2.0 interface





## Max. Measurement Range RIEGL VZ<sup>®</sup>-4000


### 30 kHz PRR

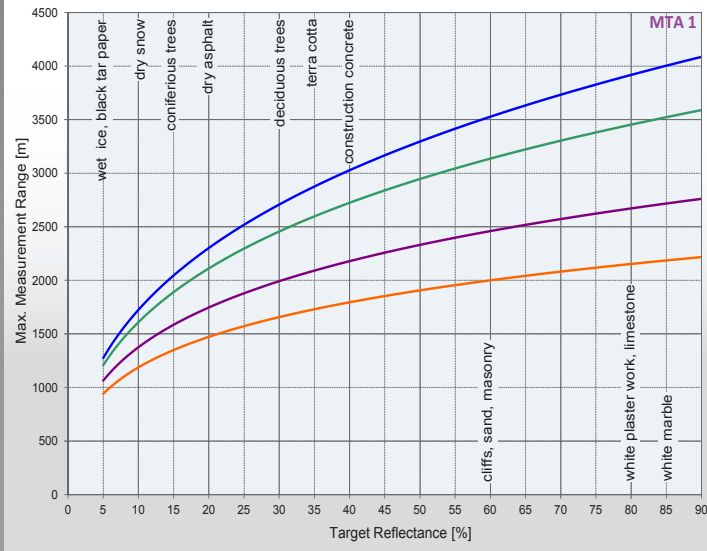


### 50 kHz PRR

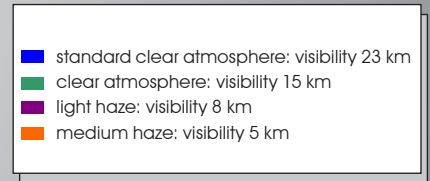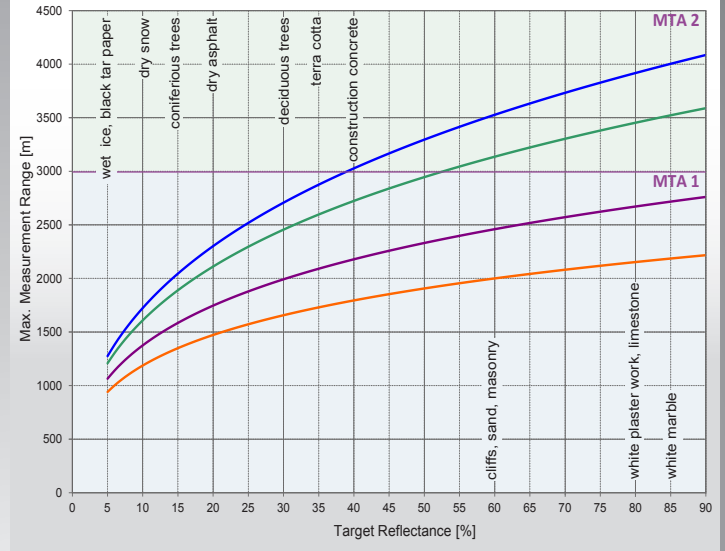

### 150 kHz PRR

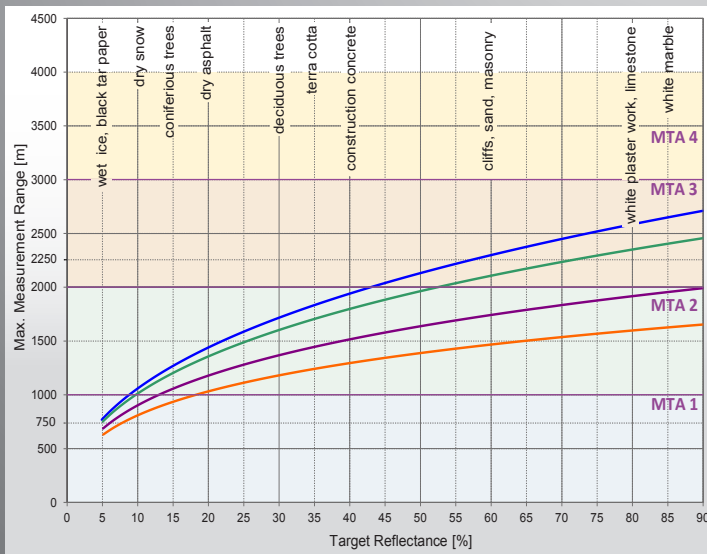

### 300 kHz PRR

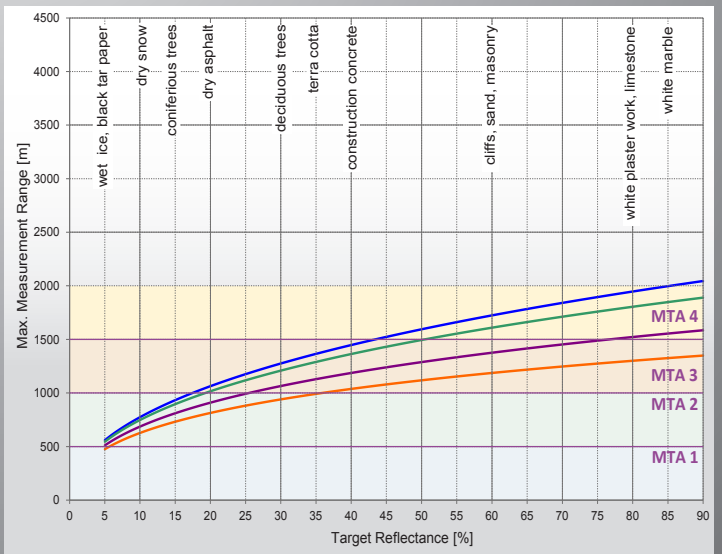

#### The following conditions are assumed:

- flat target larger than footprint of the laser beam
- perpendicular angle of incidence
- average brightness
- ambiguity resolved by post processing within RISCAN PRO / RiMINING

#### MTA zones:

- MTA 1: no ambiguity / 1 pulse „in the air“
- MTA 2: 2 pulses „in the air“
- MTA 3: 3 pulses „in the air“
- MTA 4: 4 pulses „in the air“



## User Friendly Operation

### User-Friendly and Efficient Operation and Acquisition Workflow

Operation is easy with the integrated graphical user interface via 7" touchscreen, or by remote control of the scanner via VNC Viewer with any tablet PC or mobile device via WiFi connection.

Highly efficient scan data acquisition and global registration is supported by on-board inclination sensors, integrated L1 GNSS receiver, an interface for a high-end external GNSS receiver on top of the scanner, a digital compass and built-in SSD data storage media. With a visual project overview of acquired scan data, it is possible to ensure complete data coverage or check the progress of a project as it is acquired. The system provides a number of useful features that help to increase the overall user experience. One of these features is the ability to schedule scans to be acquired fully automatically on a regularly defined time interval which is useful for capturing 4D (3D time-lapse) datasets without direct user supervision of the system.



capturing 4D (3D time-lapse) datasets without direct user supervision of the system.

### Power Supply

- intelligent power supply management, up to three independent external power sources can be connected simultaneously for uninterrupted operation
- reliable under- and over voltage protection
- wide external voltage supply range 11-32 V DC
- power consumption typ. 75 W (max. 90 W)
- LED indicators for power status

### Camera Capabilities

#### Advanced Camera Support Capability

The VZ-Line of scanners has been updated with advanced camera support capability. Utilizing a specialized interface and a universal mount system, *RIEGL* is able to provide support for a wide variety of industrial cameras in standalone operation. This development enables the VZ-4000 to **directly control, operate and acquire images from RGB, Thermal, Industrial and a number of other camera systems and types** without complex cabling, connections or the need of an external laptop. With simplified mount integrations, it is now possible to acquire advanced images from state-of-the-art camera technologies simply using *RIEGL* Terrestrial Laser Scanners.



## Technical Data RIEGL VZ<sup>®</sup>-4000

Laser Product Classification

Class 1 Laser Product according to IEC 60825-1:2014

The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2019.

CLASS 1  
LASER PRODUCT

### Range Measurement Performance <sup>1)</sup>

Measuring Principle

time of flight measurement, echo signal digitization, online full waveform analysis, multiple-time-around processing, full waveform export capability (optional)  
single pulse ranging

Mode of operation

Laser Pulse Repetition Rate PRR (peak) <sup>2)</sup>	30 kHz	50 kHz	150 kHz	300 kHz
Effective Measurement Rate (meas./sec) <sup>2)</sup>	23,000	37,000	113,000	222,000
Max. Measurement Range <sup>3)</sup>				
natural targets $\rho \geq 90\%$	4,000 m	4,000 m	2,700 m	2,000 m
natural targets $\rho \geq 20\%$	2,300 m	2,300 m	1,450 m	1,000 m
Max. Number of Targets per Pulse <sup>4)</sup>	15	15	10	9

Accuracy <sup>5) 7)</sup>

15 mm

Precision <sup>6) 7)</sup>

10 mm

Minimum Range

5 m

Laser Wavelength

near infrared

Laser Beam Divergence <sup>8)</sup>

0.15 mrad

Laser Beam Footprint (Gaussian Beam Definition)

18 mm @ exit, 75 mm @ 500 m, 150 mm @ 1000 m, 300 mm @ 2000 m

1) With online waveform processing.

2) Rounded values, selectable by measurement program.

3) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under overcast sky.

4) If the laser beam hits, in part, more than one target, the laser's pulse power is split accordingly. Thus, the achievable range is reduced.

5) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

6) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

7) One sigma @ 150 m range under RIEGL test conditions.

8) Measured at the 1/e<sup>2</sup> points. 0.15 mrad corresponds to an increase of 15 mm of beam diameter per 100 m of range.

### Scanner Performance

Scanning Mechanism

*Vertical (Line) Scan*

lightweight mirror  
rotating / oscillating

*Horizontal (Frame) Scan*

rotating head

Field of View (selectable)

total 60° (+30° / -30°)

max. 360°

Scan Speed (selectable)

100°/sec to 14 400°/sec ( $\pm 20$  rotations/sec), full FOV

0°/sec to 60°/sec <sup>9)</sup>

Angular Step Width  $\Delta \theta$  (vertical),  $\Delta \phi$  (horizontal)

$0.002^\circ \leq \Delta \theta \leq 0.280^\circ$  <sup>10)</sup>

$0.002^\circ \leq \Delta \phi \leq 3^\circ$  <sup>10)</sup>

between consecutive laser shots

between consecutive scan lines

Angle Measurement Resolution

better than 0.0005° (1.8 arcsec)

better than 0.0005° (1.8 arcsec)

Inclination Sensors

integrated, for vertical scanner setup position, details see page 2

GNSS Receiver

integrated, L1, with antenna

Compass

integrated, for vertical scanner setup position, details see page 2

Laser Plummet

integrated

Internal Sync Timer

integrated, for real-time synchronized time stamping of scan data

Scan Sync (optional)

scanner rotation synchronization

Waveform Data Output (optional)

providing digitized echo signal information for specific target echoes

9) Frame scan can be disabled, providing 2D scanner operation.

10) Selectable.



## Technical Data RIEGL VZ®-4000

### General Technical Data

Power Supply Input Voltage / Power Consumption  
External Power Supply

Main Dimensions / Weight  
Humidity / Protection Class  
Temperature Range

Storage / Operation  
Low Temperature Operation <sup>11)</sup>

### Integrated Digital Camera

### Display

11 - 32 V DC / typ. 75 W (max. 90 W)

up to 3 independent external power sources can be connected simultaneously for uninterrupted operation

248 x 226 x 450 mm (length x width x height), approx. 14.5 kg

max. 80 % non condensing @ +31°C / IP64, dust-proof and splash-proof

-10°C up to +50°C / 0°C up to +40°C (standard operation)

-20°C: continuous scanning operation if instrument is powered on while internal temperature is at or above 0°C and still air

field of view 7.2°x5.5° (v x h)

resolution 2560 x 1920 pixels (5 Mpixel)

7" WVGA (800 x 480) color

capacitive touchscreen, full operation control for stand alone usage

<sup>11)</sup> Insulating the scanner with appropriate material will enable operation at even lower temperatures.

#### Mena3D Qatar

D-Ring  
P.O.Box: 22103  
Doha, Qatar  
Phone :+974 (0) 4 03 155 55  
Fax :+974 (0) 4 46 544 05  
contact@mena3d.com

#### Mena3D s.a.r.l

Beshara El Khoury Street  
4<sup>th</sup> Floor, Ghanaja Building  
Beirut, Lebanon  
Phone :+961 (0) 70 34 54 82  
contact@mena3d.com



#### Mena3D GmbH

Vogelsangstrasse 27  
70176 Stuttgart  
Germany  
Phone:+49 (0) 711 94 56 82 82  
Fax :+49 (0) 711 94 56 82 88  
E-Mail: contact@mena3d.com  
www.mena3d.com

#### Mena3D Services s.a.r.l

112 rue Radhia Haded  
1001 Tunis  
Tunisia  
Phone:+216 (0) 71 245 692  
Fax :+216 (0) 71 245 692  
contact@mena3d.com

#### Mena3D Trading FZE

JAFZA One Building  
10<sup>th</sup> Floor BB1007, JAFZA North  
P.O. Box 18215  
Dubai, United Arab Emirates  
Phone:+971 (0) 4 88 767 46  
Fax :+971 (0) 4 88 765 18  
contact@mena3d.com

#### Mena3D S.a.r.l

Avenue Allal El Fassi  
Residence Sanaa, 4<sup>th</sup> Floor  
Apartment No. 24  
Issil Marrakech, Morocco  
Phone :+212 (0) 5 24 45 83 94  
Fax :+212 (0) 5 24 45 86 74  
contact@mena3d.com